


Type: Plug-in terminal-plug

Product name: GPD2.5-2-GY

Description: 5.2mm , 500V , 22A CE,UL

Product Picture

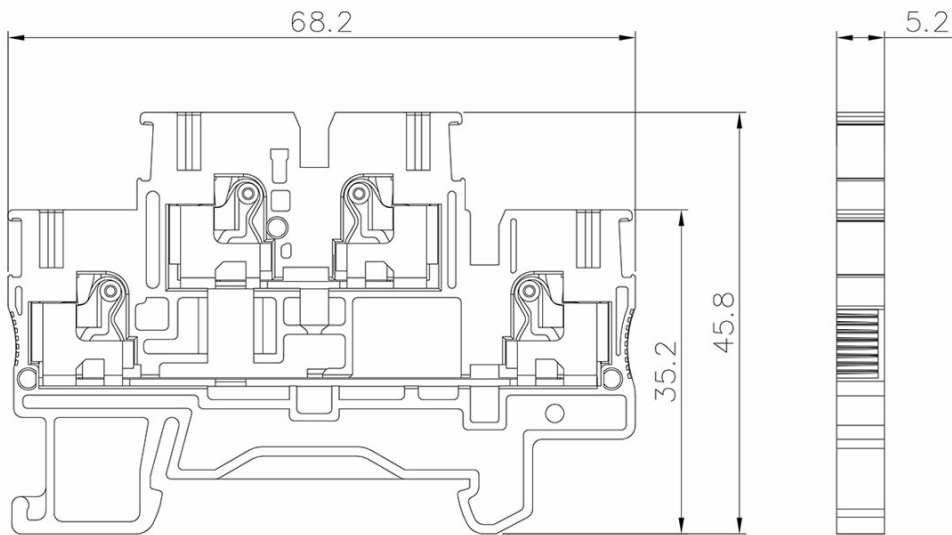

## Basic Information

Product name GPD2.5-2-GY

Width 5.2mm

Number of levels 2

Number of connections 4

Connection method Plug-in terminal-plug

Protection Level IP20

---

Work temperature	-40~+105°C
------------------	------------

---

## IEC/IEC Data

---

Rated Current	22A
---------------	-----

---

Rated Voltage	500V
---------------	------

---

Overvoltage category	III
----------------------	-----

---

Pollution degree	3
------------------	---

---

Rated impulse voltage	6KV
-----------------------	-----

---

Conductor cross section solid	0.2-4mm <sup>2</sup>
-------------------------------	----------------------

---

Conductor cross section flexible	0.2-2.5mm <sup>2</sup>
----------------------------------	------------------------

---

Conductor cross section flexible,with furrule	0.2-2.5mm <sup>2</sup>
---	------------------------

---

Stripping length	8-10mm
------------------	--------

---

## UL/UL Data

---

Use group	B	C	D
-----------	---	---	---

---

Rated Current	20A	20A	-
---------------	-----	-----	---

---

Rated Voltage	600V	600V	
---------------	------	------	--

---

Rated cross section	26-12AWG		
---------------------	----------	--	--

---

## Material Data

---

Insulation material	PA66
---------------------	------

---

Insulation material group	I
---------------------------	---

---

Flame retardant grade, UL94 compliance	V0
--	----

---

---

Contact material	Copper alloy
------------------	--------------

---

Surface characteristics	Sn,Plated
-------------------------	-----------

---